


FLYMA-JET

Aeration for Waste Water Treatment and Aquaculture

5.5 kW – 11 kW FUH-B SS 316 Housing

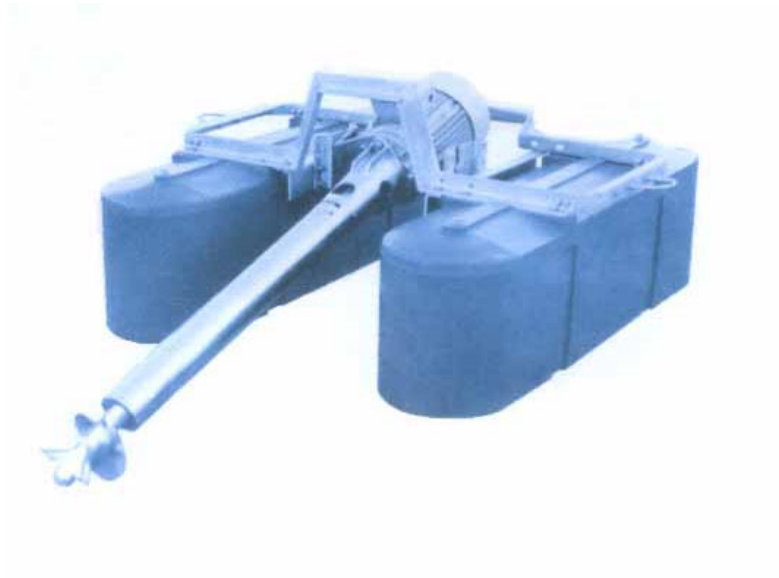

FLYMAR LTD.

2257 New Petchburi Road, Bangkapi, Huay-Kwang,
Bangkok 10310 THAILAND
Tel : +66 (0) 2718-1991 (10 lines automatic)
Fax : +66 (0) 2319-1844

General Specification

Model	FUH 055B-F1200	FUH 075-F1200	FUH 110-F1200
Power [kW/Hp]	5.5 / 7.5	7.5 / 10	11 / 15
Voltage [V] - Phase - Frequency	380V / 660V – 3 Ph. – 50 Hz		
Rated Current [A]	12	16	22.5
Insulation Class	F		
Protection Class	IP55		
Propeller	Fine Bubble Diffuser		
Propeller Speed - Approx. [rpm]	1440	1450	1460
Float	IF.20.0A x 2	IF.20.0A x 2	IF.20.0A x 2
Weight – Approx. [Kg]	172	207	243

Technical Data for Aerator and Mixing Tank

Oxygen Transfer Rate [Kg. O ₂ / Hr.]	11.2	14.9	22.4
Minimum Depth [m]	1.5	2	2.5
Maximum Depth [m]	3.5	4	5
Working Distance [m]	23	25	33
Mixing Volume [cu. m]	400	550	800

Material

Housing	Stainless Steel 316
Drive Shaft	Stainless Steel 316
Propeller	Stainless Steel 316
Mounting Bracket	Stainless Steel 304
Frame Assembly	Hot Dip Galvanized Steel
Nuts and Bolts	Stainless Steel 304
Float	Polyethylene – Polyurethane Foam Filled

Mixing volume calculated due to velocity gradient 50 Sec-1 and power unit volume 10 watt/cu.m.

Specification subject to change without notice